


# Rails: Routes

Computer Science and Engineering ■ College of Engineering ■ The Ohio State University

## Lecture 30

# Recall: Rails Architecture

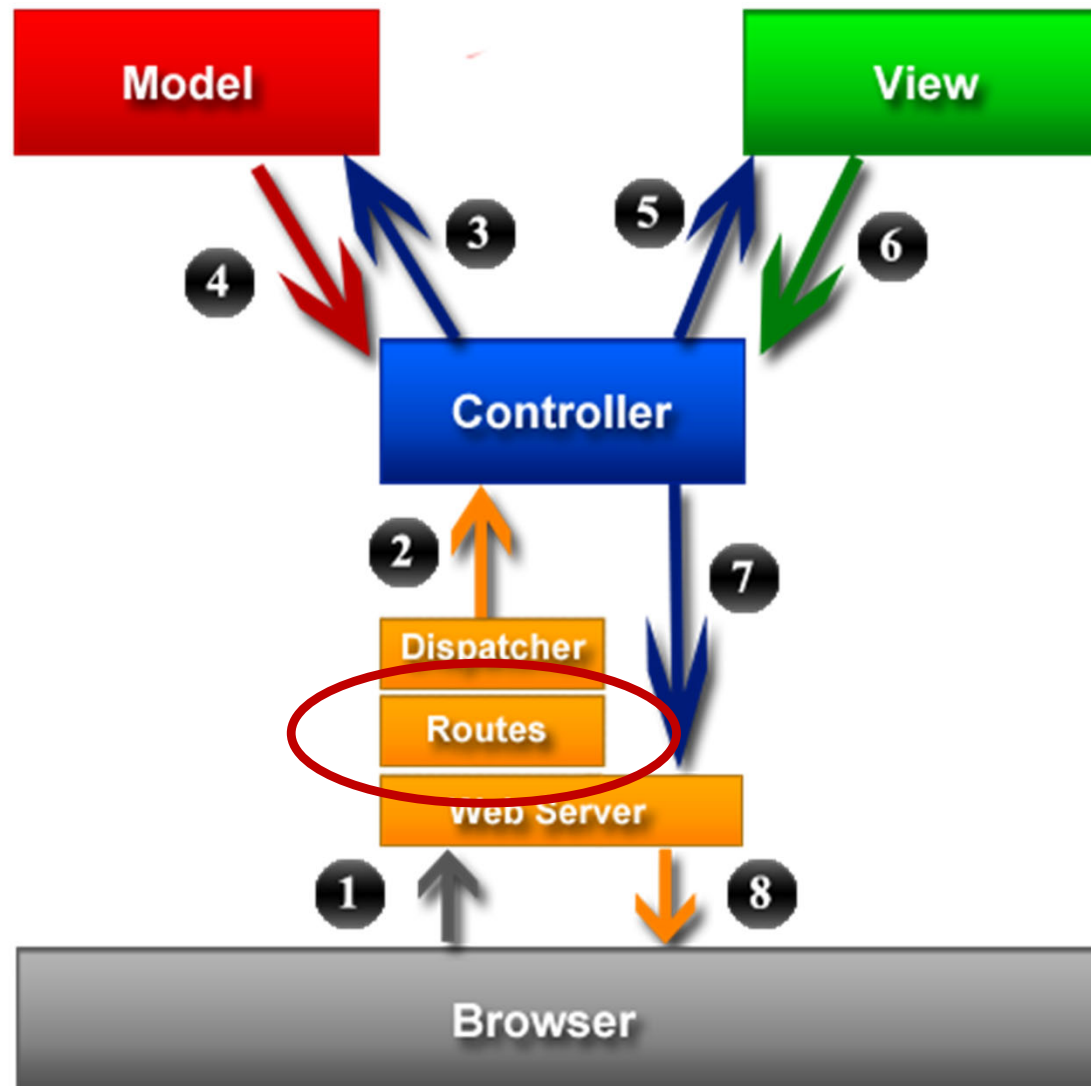

# Recall: Passing Args with HTTP

## □ GET

```
GET /passwords/?num=5&len=8&format=plain
HTTP/1.1
```

```
Host: www.random.org
```

## □ POST

```
POST /passwords/ HTTP/1.1
```

```
Host: www.random.org
```

```
Content-Type: application/x-www-form-
urlencoded
```

```
Content-Length: 24
```

```
num=5&len=8&format=plain
```

# Configuration

- Need to map an HTTP request (verb, URL, parameters) to an application action (a method in a Ruby class)
  - Framework invokes the method, passing in parameters from HTTP request as arguments
  - Results in an HTTP response, typically with an HTML payload, sent back to client's browser
- These mappings are called *routes*
- Defined in `config/routes.rb`
  - Ruby code, but highly stylized (another DSL)
  - Checked top to bottom for first match

# Basic Route

- Pattern string and application action
  - In config/routes.rb
  - Pattern string usually contains *segments*
- Example route

```
get 'status/go/:system/memory/:seg',  
    to: 'reporter#show'
```
- Matches any HTTP request like

```
GET /status/go/lander/memory/0?page=3
```
- Result:
  - Instantiates **ReporterController**
  - Invokes **show** method on that new instance
  - Provides a hash-like object called **params**

```
params == { system: "lander",  
            seg: "0",  
            page: "3" }
```

# Default Values

- ❑ Special segments
  - `:controller` - the controller class to use
  - `:action` - the method to invoke in that controller
- ❑ Example route

```
get ':controller/go/:action/:system'
```
- ❑ Matches *any* HTTP request like

```
GET /reporter/go/show/lander?page=3
```
- ❑ Result:
  - Instantiates `ReporterController`
  - Invokes `show` method on that new instance
  - Provides an object called `params`

```
params == { system: "lander",  
           page: "3",  
           # also :controller and :action }
```
- ❑ Note: Not recommended
  - Opens app up too much to scary internet

# Customizing Routes

- Recognize different HTTP verb(s)
  - `get, put, post, delete`
  - Alternative: `match` via: `[:get, :post]`
- Optional segments with ( )  
`get ':controller(/:action(/:id))'`
- Default values for params  
`get 'photos/:id', to: 'photos#show',  
 defaults: { format: 'jpg' }`

# REST

- REpresentational State Transfer
  - An architectural style for web applications
  - Maps database operations to HTTP requests
- Small set of database operations (CRUD)
  - Create, Read, Update, Delete
- Small set of HTTP verbs, with fixed semantics (*e.g.*, idempotence)
  - GET, POST, PUT, DELETE
- The protocol is stateless
- *Resource*: bundle of (server-side) state
  - Each resource is identified by a URL



# Resources

- A resource could be an individual *member*
  - Example: a single student
  - Corresponds to a row in a table
- A resource could be a *collection* of items
  - Example: a set of students
  - Corresponds to a table
- In REST, resources have URLs
  - Each member element has its own URL  
`http://quickrosters.com/students/42`
  - Each collection has its own URL  
`http://quickrosters.com/students`

# Read Collection: GET



```
GET /students HTTP/1.1  
Host: quickrosters.com
```


Request



# Read Collection: GET



```
GET /students HTTP/1.1
Host: quickrosters.com
```



## Students

**Fname:** Marco

**Lname:** Pantani

**Buckid:** 22352022

[Show this student](#)

**Fname:** Primo

**Lname:** Carnera

**Buckid:** 334432

[Show this student](#)

**Fname:**

**Lname:** Cher

**Buckid:** 34822039


[Show this student](#)

[New student](#)

Request



# Read Collection: GET



## Students

Fname: Marco

Lname: Pantani

Buckid: 22352022

[Show this student](#)

Fname: Primo

Lname: Carnera

Buckid: 334432

[Show this student](#)

Fname:

Lname: Cher

Buckid: 34822039

[Show this student](#)

[New student](#)



# HTML Source (GET Collection)

```
...
<h1>Students</h1>


<div id="students">
  <div id="student_1">
    <p> <strong>Fname:</strong> Marco </p>
    <p> <strong>Lname:</strong> Pantani </p>
    <p> <strong>Buckid:</strong> 22352022 </p>
  </div>
  <p> <a href="/students/1">Show this student</a> </p>
  <div id="student_2">
    <p> <strong>Fname:</strong> Primo </p>
    <p> <strong>Lname:</strong> Carnera </p>
    <p> <strong>Buckid:</strong> 334432 </p>
  </div>
  <p> <a href="/students/2">Show this student</a> </p>
  ...
  <a href="/students/new">New student</a>
</div>
...
```

# Read Member: GET



GET /students/2

Request

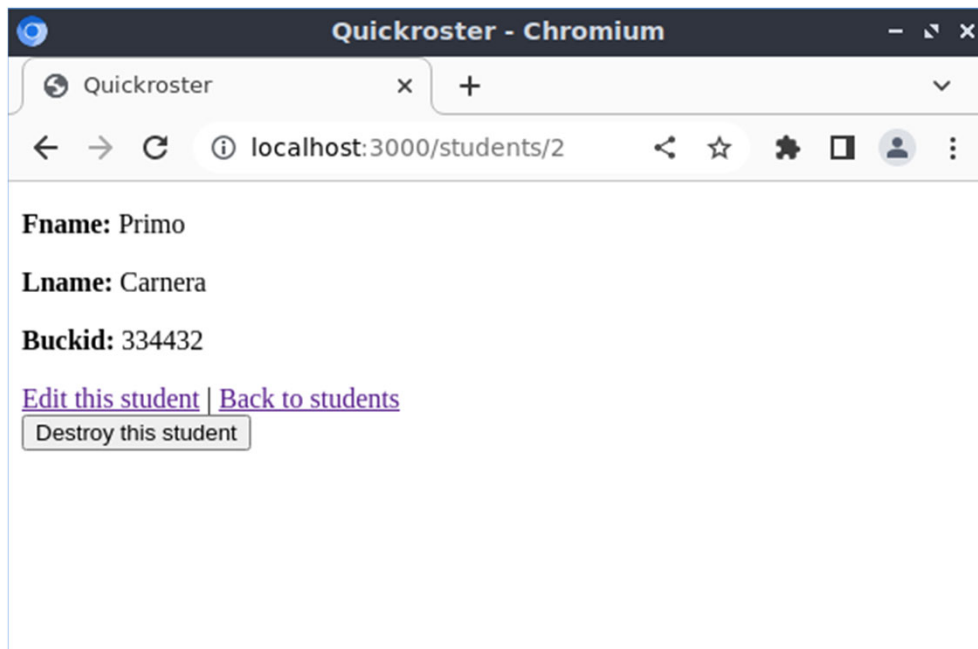

# Minimal Set of Routes (R)

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		
POST		
DELETE		

# Minimal Set of Routes (CR)

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		
POST		
DELETE		

- How to map “create member” action?
  - Member doesn't exist → target is ... ?
  - Creation *is not* idempotent → verb is ... ?



# Minimal Set of Routes (CR)

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		
POST		
DELETE		

- How to map “create member” action?
  - Member doesn’t exist → target is **collection**
  - Creation *is not* idempotent → verb is **post**

# Minimal Set of Routes (CR)

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		
POST	Create a new member	
DELETE		

- How to map “create member” action?
  - Member doesn’t exist → target is collection
  - Creation is not idempotent → verb is post

# Minimal Set of Routes (CRU)

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		
POST	Create a new member	
DELETE		

- How to map “update member” action?
  - Target is... a member
  - Update overwrites, so it *is* idempotent...

# Minimal Set of Routes (CRU)

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		Update member
POST	Create a new member	
DELETE		

- How to map “update member” action?
  - Target is a member
  - Update overwrites, so it is idempotent...

# Minimal Set of Routes (CRUD)

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		Update member
POST	Create a new member	
DELETE		Delete this member

❑ Delete action destroys a member

# Minimal Set of Routes

	Collection /students	Member /students/42
GET	List all members	Show info about a member
PUT		Update member
POST	Create a new member	
DELETE		Delete this member

## □ Implications

- You can't delete a collection
- No idempotent operations on collection


# Typical Workflow: Delete

- How does one destroy a member?
  - Need to issue an HTTP request:  
`DELETE /students/4`
- Protocol:
  - GET the member to see the details
  - Click a button on that page to issue a DELETE for that member

# GET Member, Then DELETE



GET /students/2

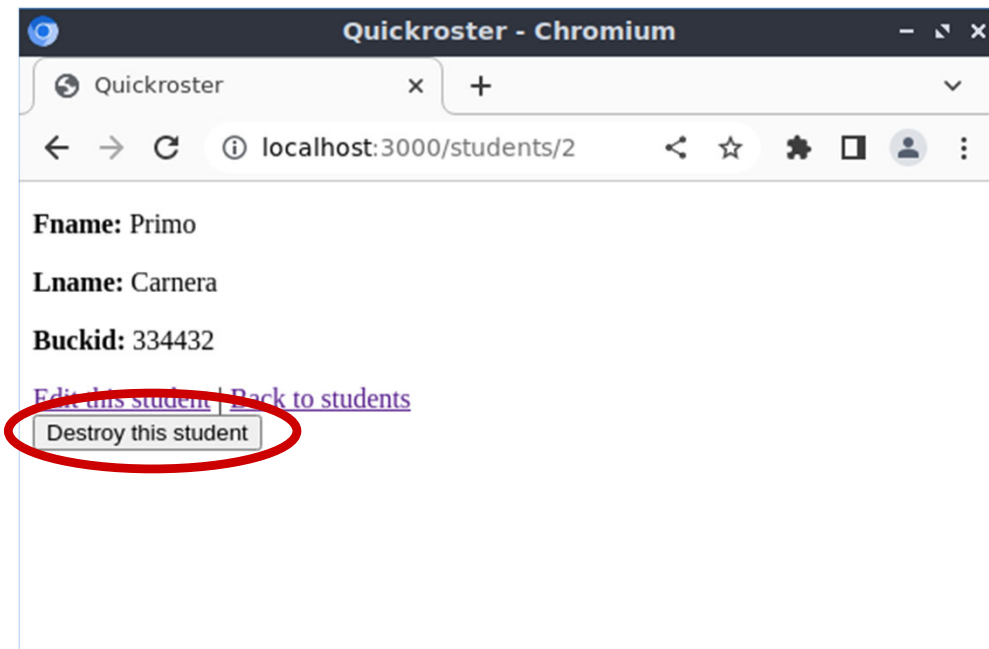

Request



DELETE /students/2






# HTML of Member (for DELETE)

```
...
<div id="student_2">
  <p> <strong>Fname:</strong> Primo </p>
  <p> <strong>Lname:</strong> Carnera </p>
  <p> <strong>Buckid:</strong> 334432 </p>
</div>
<div>
  <a href="/students/2/edit">Edit this student</a> |
  <a href="/students">Back to students</a>
  <form class="button_to"
        method="post"
        action="/students/2">
    <input type="hidden" name="_method" value="delete" />
    <button type="submit">Destroy this student</button>
  </form>
</div>
```


# Typical Workflow: Create

- How does one issue a POST on collection?
  - GET a (blank) form
  - Fill in fields of form
  - Click a button to submit, resulting in the POST
- That first GET is *a new route*
  - GET on the collection
  - But instead of a list of members, the result is a form to be filled in and submitted

# GET Blank Form, POST the Form



GET *"a blank form"*

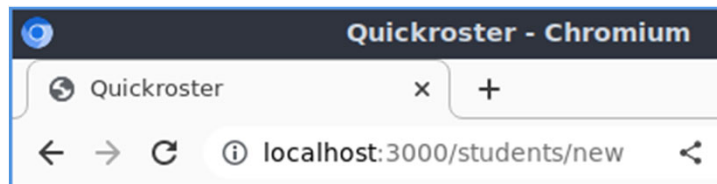

POST /students  
lname: ...etc



# Standard Set of Routes

	Collection /students	Member /students/42
GET	1. List all members 2. Form for entering a new member's data	1. Show info about a member
PUT		Update member
POST	Create a new member	
DELETE		Delete this member

# HTML of Collection


```
...
<h1>Students</h1>

<div id="students">
  <div id="student_1">
    <p> <strong>Fname:</strong> Marco </p>
    <p> <strong>Lname:</strong> Pantani </p>
    <p> <strong>Buckid:</strong> 22352022 </p>
  </div>
  <p> <a href="/students/1">Show this student</a> </p>
  <div id="student_2">
    <p> <strong>Fname:</strong> Primo </p>
    <p> <strong>Lname:</strong> Carnera </p>
    <p> <strong>Buckid:</strong> 334432 </p>
  </div>
  <p> <a href="/students/2">Show this student</a> </p>
  ...
  <a href="/students/new">New student</a>
</div>
...
```

# Typical Workflow: Update

- How does one issue a PUT on a member?
  - GET a (populated) form
  - Edit the fields of the form
  - Click a button to send, resulting in the PUT
- That first GET is *a new route*
  - GET on a member
  - But instead of a display of information about that member, the result is a populated form to modify and submit

# GET Filled Form, PUT the Form

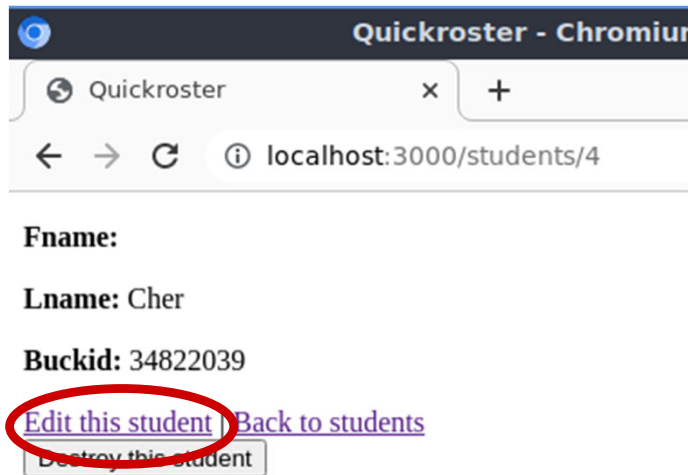

Quickroster - Chromium

Quickroster x +

localhost:3000/students/4

Fname:


Lname: Cher

Buckid: 34822039

[Edit this student](#) [Back to students](#)

[Destroy this student](#)

GET *"a populated form"*

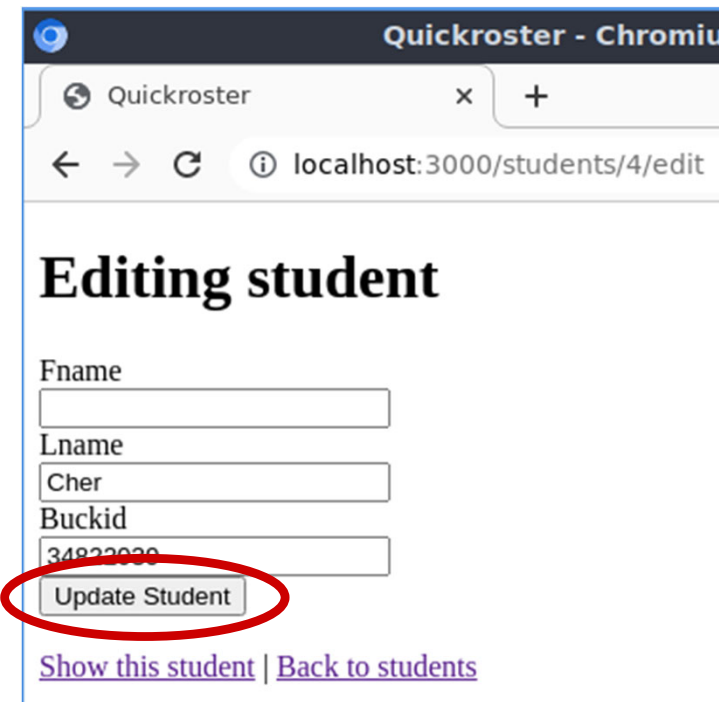

Quickroster - Chromium

Quickroster x +

localhost:3000/students/4/edit

## Editing student

Fname

Lname

Buckid

[Update Student](#)

[Show this student](#) | [Back to students](#)

PUT /students/4  
lname: ...etc



# Standard Set of Routes

	Collection /students	Member /students/42
GET	1. List all members 2. Form for entering a new member's data	1. Show info about a member 2. Form for editing an existing member's data
PUT		Update member
POST	Create a new member	
DELETE		Delete this member



# HTML of Member

```
...
<div id="student_2">
  <p> <strong>Fname:</strong> Primo </p>
  <p> <strong>Lname:</strong> Carnera </p>
  <p> <strong>Buckid:</strong> 334432 </p>
</div>
<div>
  <a href="/students/2/edit">Edit this student</a> |
  <a href="/students">Back to students</a>
  <form class="button_to"
    method="post"
    action="/students/2">
    <input type="hidden" name="_method" value="delete" />
    <button type="submit">Destroy this student</button>
  </form>
</div>
```

# Rails Resource-Based Routes

- For a resource like `:students`, the action pack includes
  - 1 controller (`StudentsController`)
  - 7 routes (each with a method in controller)
  - 4 Views (list of students, show 1 student, new, edit)

HTTP Verb	URL	Resource	Method	Response (View)
GET	<code>/students</code>	Collection	<code>index</code>	list all
POST	<code>/students</code>	Collection	<code>create</code>	show one
GET	<code>/students/new</code>	Collection	<code>new</code>	blank form
GET	<code>/students/3</code>	Member	<code>show</code>	show one
GET	<code>/students/3/edit</code>	Member	<code>edit</code>	filled form
PUT	<code>/students/3</code>	Member	<code>update</code>	show one
DELETE	<code>/students/3</code>	Member	<code>destroy</code>	list all

# Defining Resource-Based Routes

- ❑ In RosterTool app's `config/routes.rb`  
`Rails.application.routes.draw do`  
    **`resources :students`**  
    **`resources :faculty`**  
`end`

# Customizing Routes

- ❑ To change which 7 routes are created

```
resources :students, except:
                        [:update, :destroy]
resources :grades, only: [:index, :show]
```
- ❑ To specify a particular controller

```
resources :students, controller: 'ugrads'
```
- ❑ To rename certain actions

```
resources :students, path_names:
                        { create: 'enroll' }
```
- ❑ To add more routes to standard set
  - Add GET /students/:id/avatar (*i.e.* on member)
  - Add GET /students/search (*i.e.* on collection)

```
resources :students do
  get 'avatar', on: :member
  get 'search', on: :collection
end
```

# Segment Keys

- URL request has *arguments* for controller
  - Example: products/**42**
  - Pattern string: 'products/**:id**'
- Segment key gets value when route matches
- Controller gets a hash (called **params**) of segment keys and their values
  - Example: **params[:id]** is '42'
- Common case: Look up an item by id

```
def set_product
  @product = Product.find(params[:id])
end
```

# Recognition vs Generation

- Dual problems
  - Recognize a URL (request for an action)
  - Generate a URL (a hyperlink or redirect)
- Routes used for both!
- For generation, route must be *named*  
get 'status/:seg', to: 'reporter#show',  
as: :info
- Results in two helpers (`_path`, `_url`)  
`info_path(4) ==> "/status/4"`  
`info_url(4) ==> "http://faces.com/status/4"`
- Used with `link_to` to generate hyperlinks  
`link_to 'S', info_path(4), class: 'btn'`  
`==> "<a class='btn' href='/status/4'>S</a>"`

# Helper Methods for Resources

## □ Resource-based routes have names

`photos_path` *==> /photos*  
`photos_url` *==> http://faces.com/photos*  
`new_photo_path` *==> /photos/new*  
`photo_path(:id)` *==> /photos/4*  
`edit_photo_path(:id)` *==> /photos/4/edit*

Name	HTTP	URL	Resource	Method
photos	GET	/photos	Collection	index
	POST	/photos	Collection	create
new_photo	GET	/photos/new	Collection	new
photo	GET	/photos/3	Member	show
edit_photo	GET	/photos/3/edit	Member	edit
	PUT	/photos/3	Member	update
	DELETE	/photos/3	Member	destroy

# Debugging Routes and Helpers

- To see the full list of routes

```
$ rails routes
```

	Prefix	Verb	URI Pattern	Contr#Action
	info	GET	/status/:seg	reporter#show
	photos	GET	/photos	photos#index
		POST	/photos	photos#create
	photo	GET	/photo/:id	photos#show
	edit_photo	GET	/photos/:id/edit	...

*...etc...*

- To see/use helpers in the console

```
$ rails console
```

```
> app.edit_photo_path(42)
```

```
=> "/photos/42/edit"
```

```
> helper.link_to 'Click here',  
  app.edit_photo_path(42)
```

```
=> "<a href=\"/photos/42/edit\">Click here</a>"
```



# Root Route

- With no matching route, **GET** for `http://example.com` gets `index.html` from application's public directory
  - To customize landing page, 2 choices:
    - Create `public/index.html`
    - Add `root` route to `config/routes.rb`, pointing to a `controller#action` (better)
- `root to: "welcome#index"`

# Summary

## □ REST and CRUD

- Create, read, update, destroy
- Map data to resources
- Map actions to HTTP requests (verb + URL)

## □ Routes

- Connect HTTP request to specific method in a controller class
- Defined in config/routes.rb
- Resource based, or match-based
- Dual problem: recognition and generation

# Singleton Resources

- Declared with singular syntax  
`resource :system`
- You get only 1 resource, not 2
  - Controller still plural (e.g., `SystemsController`)
  - URLs are singular (e.g., `/system/edit`)
- Only 6 standard routes
  - No index collection action to list members
  - `POST /system -> create`
  - `GET /system/new -> new`
  - `GET /system/edit -> edit`
  - `GET /system -> show`
  - `PUT /system -> update`
  - `DELETE /system -> destroy`